

SILENTPLUS RUBBER HF

Halogen-free acoustic insulation sheet. A multilayer composed of expanded foam material (FEF), high density elastomeric barrier and external protective glossy black aluminium foil. Suitable to solve problems of acoustic insulation in building and industrial applications.

APPLICATIONS FIELDS



Industrial



Air Conditioning



Building



Refrigeration



Heating & Plumbing






SILENTPLUS RUBBER HF

TYPE OF MATERIAL:	Halogen-free soundproofing barrier layer coupled with a flexible elastomeric foam (FEF) sheet and protected with aluminium foil
PRODUCT RANGE:	Sheets in roll with dimension of 1 x 2 m with thickness of 12 mm (2 mm of high-density elastomeric barrier + 10 mm of flexible elastomeric foam sheet). Available also in self-adhesive version
FIELDS OF APPLICATION:	Acoustic insulation of walls, floors and ceilings; enclosures for motors and air-conditioning equipment; acoustic insulation of water pipes, drains and heating & plumbing services in commercial, industrial and domestic applications
DIMENSIONAL TOLERANCES:	In accordance with the European Standard EN 14304
ENVIRONMENTAL INFORMATION:	Flexible and expanded CFC and HCFC-free rubber foam. It does not damage the ozone layer (ODP zero) and does not contribute to the greenhouse effect (GWP zero). Free from lead, bitumen and fibres
ADDITIONAL INFORMATION:	Self-adhesive material: acrylate based adhesive coating reinforced with mesh structure. Protection liner made of polyolefin foil. Traces of silicon can be found on the foil protecting the self-adhesive coating
STORAGE CONDITIONS/SHELF LIFE:	Store the material in a dry and clean environment at a temperature between 0 °C and 35 °C and a RH between 50% and 70%. Do not expose the material to heat or direct sunlight when stored. Self-adhesive products should not be kept in storage for more than one year

PHYSICAL PROPERTIES	RESULT OBTAINED				TEST METHOD		
OPERATING TEMPERATURE RANGE	-45 °C +130 °C				EN 14706		
THERMAL CONDUCTIVITY	At a mean temperature of 0 °C	$\lambda \leq 0,036 \text{ W/m-K}$			EN 12667		
	At a mean temperature of +40 °C	$\lambda \leq 0,040 \text{ W/m-K}$					
MEASUREMENT OF NOISE FROM WASTE WATER INSTALLATIONS	Reduction of air-borne sound transmission	Flow rate (L/s)	0,5	1	2	4	UNI EN 14366
		dB(A)	12	12	10,5	10,5	
	Structure-borne sound level	Flow rate (L/s)	0,5	1	2	4	
		dB(A)	15,5	16,6	18,4	19,6	
HARDNESS*	80 ± 10 Shore A				UNI EN ISO 868		
TENSILE STRENGTH*	> 1N/mm ²				DIN 53504 / UNI 6065		
ELONGATION AT BREAK*	> 20%				DIN 53504 / UNI 6065		
FIRE PERFORMANCE	European Standard Euroclass	D-s2,d0			EN 13501-1		

*Data refer exclusively to the 2 mm high density layer.

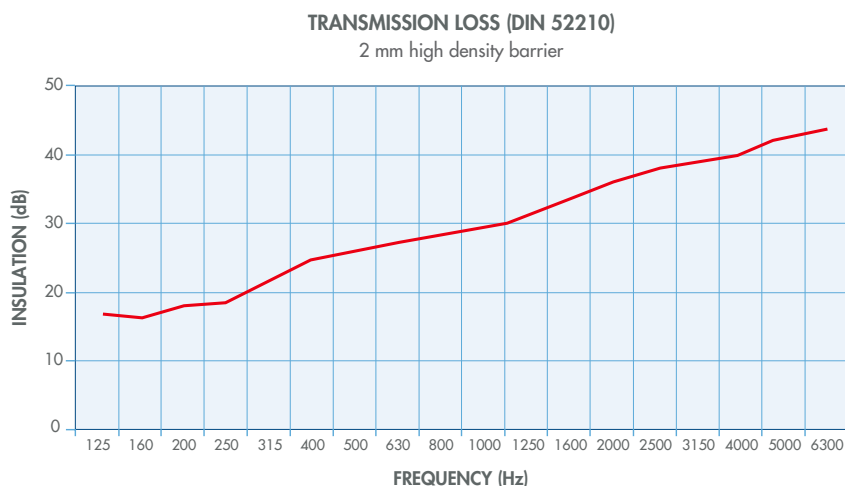

For information regarding the chemical resistance of the product please consult the specific technical documentation.

The self-adhesive version has been designed with the aim to make installation easier. Given the high specific weight of the material, a mechanical fastening is recommended.

System 3 CE Marking in accordance with the European Standard EN 14304.

The product meets the requirements for the achievement of the Eco-Bau classification.

All the normatives quoted in this document are updated to the latest issued version.

Union Foam S.p.A. reserves the right to modify any information at any time without prior notice.

SILENTPLUS RUBBER HF

2 m LENGTH ROLLS, 1 m WIDTH


Item No.	Sheet dimension (m)	m ² /box
02 + 10SIL RUB GT HFN	1 x 2	2

Product not in stock, available on request and based on minimum purchasing quantities.


SELF-ADHESIVE

Item No.	Sheet dimension (m)	m ² /box
02 + 10SIL RUB GT HFN ADR	1 x 2	2

Product not in stock, available on request and based on minimum purchasing quantities.

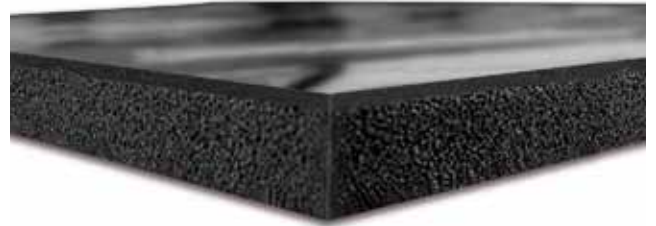


Packaging dimensions:
(volume = 0,05 m³)

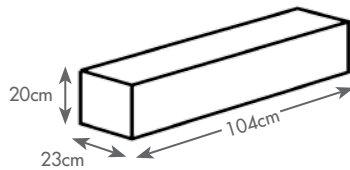

Pallet dimensions:

105 x 105 x 196 cm
Volume = 2,16 m³
Box/pallet = 40

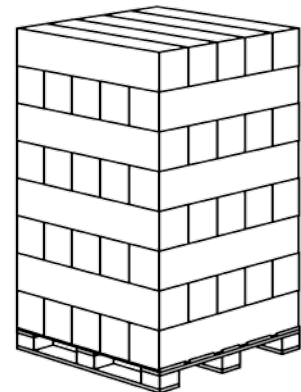

THERMAL INSULATION PRODUCTS FOR BUILDING EQUIPMENT AND INDUSTRIAL INSTALLATIONS. FACTORY MADE FLEXIBLE ELASTOMERIC FOAM (FEF) PRODUCTS

Dimensional tolerances specified by the European product Standard EN 14304

Form of delivery	Length	Width	Thickness		Squareness	Inside diameter	
			Declared	Tolerance		$D_i \leq 100$	$D_i > 100$
Tubes	$\pm 1,5\%$	-	$d_o \leq 8$	± 1	3,0 mm	$D_{id} + 1 \leq D_i \leq D_{id} + 4$	$D_{id} + 1 \leq D_i \leq D_{id} + 4$
			$8 < d_o \leq 18$	$\pm 1,5$			
			$18 < d_o \leq 31$	$\pm 2,5$			
			$d_o > 31$	± 3			
Sheets	$\pm 1,5\%$	$\pm 2\%$	$d_o \leq 6$	± 1	3,0 mm/m (length/width) 3,0 mm (thickness)	-	-
			$6 < d_o \leq 19$	$\pm 1,5$			
			$d_o > 19$	± 2			
Rolls	+ 5% - 1.5%	$\pm 2\%$	$d_o \leq 6$	± 1	3,0 mm/m (length/width) 3,0 mm (thickness)	-	-
			$6 < d_o \leq 19$	$\pm 1,5$			
			$d_o > 19$	± 2			
Tapes	+ 5% - 1.5%	$\pm 2\%$	$d_o = 3$	- 0.1 + 1,5	-	-	-



Union Foam S.p.A.
 via dell'Industria 11
 20882 Bellusco (MB) Italy
 tel. +39.039.62089.1
 sales@unionfoam.it
 www.unionfoam.it