

EUROBATEX® OC

A range of granulated FEF material in a resin binder supplied in sheet form, for use as a soundproofing and impact sound insulation in sub-floor applications. Also used as a system component for thermal and acoustic insulation in industrial applications.

APPLICATIONS FIELDS



Industrial



Air Conditioning




Building



Refrigeration



Heating & Plumbing

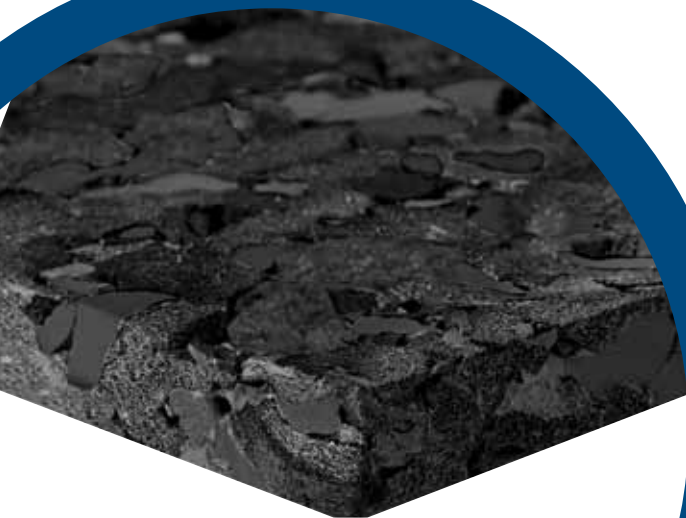

EUROBATEX® OC

TYPE OF MATERIAL:	Granulated Flexible Elastomeric Foam (FEF) held together by a polyurethane resin binder
PRODUCT RANGE:	Sheets available in a range of thicknesses from 10 mm to 40 mm. Available at density of 160 kg/m ³ or 240 kg/m ³ (tolerance -20 +120 kg/m ³). Different thicknesses are available upon request
FIELDS OF APPLICATION:	Acoustic absorption
STORAGE CONDITIONS/SHELF LIFE:	Store the material in a dry and clean environment at a temperature between 0 °C and 35 °C and a RH between 50% and 70%. Do not expose the material to heat or direct sunlight when stored

PHYSICAL PROPERTIES	RESULT OBTAINED		TEST METHOD
OPERATING TEMPERATURE RANGE	-45 °C +110 °C		-
ACOUSTIC ABSORPTION (α) Thk. 25 mm, Δ 240 Kg/m ³	250 Hz 500 Hz 1000 Hz 2000 Hz 4000 Hz 5000 Hz	0,26 0,7 0,9 0,85 0,85 0,85	UNI EN ISO 354
FIRE PERFORMANCE	Self-extinguishing, does not spread flame		

All the normatives quoted in this document are updated to the latest issued version.
 Union Foam S.p.A. reserves the right to modify any information at any time without prior notice.

EUROBATEX® OC


1 x 2 m FLAT SHEETS

Item No.		Thickness mm	Flat sheets dimension m	sheets/pallet
Δ 160	Δ 240			
10EUR OC 160	10EUR OC 240	10	1 x 2	100
20EUR OC 160	20EUR OC 240	20	1 x 2	50
25EUR OC 160	25EUR OC 240	25	1 x 2	40
30EUR OC 160	30EUR OC 240	30	1 x 2	33
40EUR OC 160	40EUR OC 240	40	1 x 2	25



Pallet dimensions:

210 x 120 x 115 cm
Volume = 2,9 m³

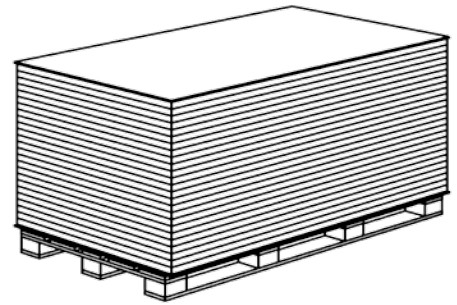

Union Foam S.p.A.
via dell'Industria 11
20882 Bellusco (MB) Italy
tel. +39.039.62089.1
sales@unionfoam.it
www.unionfoam.it