




SILENTPLUS RUBBER

TYPE OF MATERIAL:	Soundproofing barrier layer coupled with a flexible elastomeric foam (FEF) sheet
PRODUCT RANGE:	Sheets in roll with dimension of 1 x 2 m and thickness of 12 mm (2 mm of high-density elastomeric barrier + 10 mm of flexible elastomeric foam sheet). Available also in self-adhesive version
FIELDS OF APPLICATION:	Acoustic insulation of walls, floors and ceilings, water pipes, drains, air conditioning equipment and heating & plumbing services in commercial, industrial and domestic application
DIMENSIONAL TOLERANCES:	In accordance with the European Standard EN 14304
ENVIRONMENTAL INFORMATION:	CFC and HCFC-free insulation compound. It does not damage the ozone layer (ODP zero) and does not contribute to the greenhouse effect (GWP zero). Free from lead, bitumen and fibres
ADDITIONAL INFORMATION:	Self-adhesive material: acrylate based adhesive coating reinforced with mesh structure. Protection liner made of polyolefin foil. Traces of silicon can be found on the foil protecting the self-adhesive coating
STORAGE CONDITIONS/SHELF LIFE:	Store the material in a dry and clean environment at a temperature between 0 °C and 35 °C and a RH between 50% and 70%. Do not expose the material to heat or direct sunlight when stored. Self-adhesive products should not be kept in storage for more than one year

PHYSICAL PROPERTIES	RESULT OBTAINED					TEST METHOD	
OPERATING TEMPERATURE RANGE	-45 °C +110 °C					EN 14706	
THERMAL CONDUCTIVITY	At a mean temperature of 0 °C	$\lambda \leq 0,034 \text{ W/m}\cdot\text{K}$				EN 12667	
	At a mean temperature of +40 °C	$\lambda \leq 0,038 \text{ W/m}\cdot\text{K}$					
MEASUREMENT OF NOISE FROM WASTE WATER INSTALLATIONS	Reduction of air-borne sound transmission	Flow rate (L/s)	0,5	1	2	4	UNI EN 14366
		dB(A)	12	12	10,5	10,5	
	Structure-borne sound level	Flow rate (L/s)	0,5	1	2	4	
		dB(A)	15,5	16,6	18,4	19,6	
HARDNESS*	80 ± 10 Shore A					UNI EN ISO 868	
TENSILE STRENGTH*	> 1N/mm ²					DIN 53504 / UNI 6065	
ELONGATION AT BREAK*	> 20%					DIN 53504 / UNI 6065	
FIRE PERFORMANCE	European Standard Euroclass	D-s2,d0				EN 13501-1	
	Swiss Reaction to Fire group	RF3				VKF Directive 13-15	

*Data refer exclusively to the 2 mm high density layer.

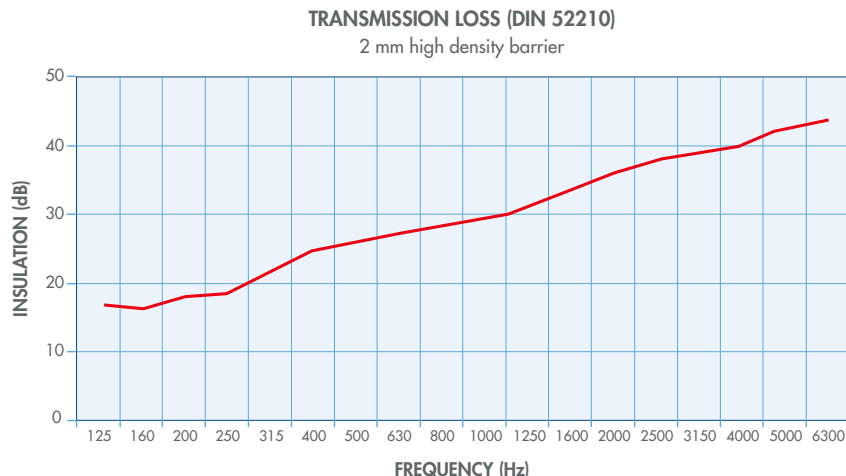

For information regarding the chemical resistance of the product please consult the specific technical documentation. The self-adhesive version has been designed with the aim to make installation easier. Given the high specific weight of the material, a mechanical fastening is recommended.

System 3 CE Marking in accordance with the European Standard EN 14304.

The product meets the requirements for the achievement of the Eco-Bau classification.

All the normatives quoted in this document are updated to the latest issued version.

Union Foam S.p.A. reserves the right to modify any information at any time without prior notice.